

Express mail EK 954544597 US
Docket # FR 92000 0055 US1

#5



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00480103.1

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 14/12/00
LA HAYE, LE

This Page Blank (uspto)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.:
Demande n°: 00480103.1

Anmeldetag:
Date of filing:
Date de dépôt: 14/11/00

Anmelder:
Applicant(s):
Demandeur(s):
INTERNATIONAL BUSINESS MACHINES CORPORATION
Armonk, NY 10504
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Object-oriented method of transferring a file system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:
Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

This Page Blank (uspto)

OBJECT-ORIENTED METHOD OF TRANSFERRING A FILE SYSTEM

Technical field

The present invention relates generally to the transfer of data files between two servers over any transfer medium and
5 relates in particular to an object-oriented method of transferring a file system from a source data storage in source data processing to a destination data storage in a destination data processing unit

Background

10 With the growth in data file transfers over data transmission networks such as Internet and the increasing amount of data which are stored in the data storage of the data processing units under the form of file systems, the transfer of data files over a transfer medium has raised more and more
15 problems. Thus, it is current today to have to transfer a complex directory structure composed of more than 200 subdirectories with a depth greater than 5 levels and including more than 1000 files that represent a volume of data greater than 1 Gigabit.

When transferring data files over an IP network, a known solution consists in using the File transfer Protocol (FTP). But, this protocol requires to generate a directory identical to the origin directory in the destination equipment.

5 Unfortunately, many tools based upon FTP do not automatically create a directory structure. Furthermore, with a complex file system containing many files representing a very important volume of data, checking the data integrity is not easy and requires an important processing time.

10 Always when transferring the files over the IP network, a partial solution to the above problem is to use a specific tool such as Softdist or Tivoli. Such tools use an owner code packaging method to generate code-blocks only readable and usable by themselves. This tool solves the problem of data
15 integrity but it remains the drawback that it is an owner method which depends entirely on the operating system of the destination server. Furthermore, since the code blocks generated by the tool are only readable by themselves, it is not possible to know the contents of these code-blocks.

20 In order to be able to transfer data files over any kind of connection and not only a network, installer tools have been developed. Unfortunately, such tools are not adapted for transferring important system files. As for the Tivoli tools, they depend on the operating system of the destination server.
25 Furthermore, as these tools create auto-extractable files, it is not possible to know the contents of such auto-extractable files.

Summary of the invention

30 Accordingly, the main object of the invention is to achieve a method of transferring file systems over any kind of transfer

medium between a source data processing unit and a destination data processing unit.

Another object of the invention is to achieve a method of transferring a file system between a source data processing unit and a destination processing unit wherein the user keeps an easy knowledge and understanding of the file structure being transferred.

The invention relates therefore to an object-oriented method of transferring a file system including folders and data files from a source data storage controlled by a source data processing unit to a destination data storage controlled by a destination data processing unit over a transfer medium. This method consists in building in the source data storage at least a file object containing the data package to be transferred, generating a descriptor file including the parameters associated with the file object, generating an archive file including the data package, and transmitting the descriptor file and the archive file from the source data processing unit to the destination data processing unit over the transfer medium.

According to an important feature of the invention, the file object is built by using a file transfer tool model including a header containing the following functions : set directory name, get environment, set environment, create and install data, and a body containing the following items : directory name directory install, size, version and data package

Brief description of the drawings

The above and other objects, features and advantages of the invention will be better understood by reading the following more particular description of the invention in conjunction with the accompanying drawings wherein :

- Fig. 1 represents a file system including folders and files to be transferred according to the method of the invention.
- Fig. 2 represents a file transfer tool model being used to build the objects to be transferred from the file system illustrated in Fig. 1.
- Fig. 3 represents schematically how the file system of Fig. 1 is divided in several objects to be built according to the file transfer tool model illustrated in Fig. 2.
- Fig. 4 is a flow chart of the steps which are achieved to generate the descriptor file and the archive file to be transferred from the source data processing unit to the destination data processing unit.
- Fig. 5 is a flow chart of the steps which are achieved to build the file system in the storage of the destination data processing unit upon receiving the descriptor file and the archive file.

Detailed description of the invention

A file system to be transferred according to the method of the invention includes folders and files as shown in Fig. 1. Such a file system is represented as a tree beginning with one and only one root directory called a repository (REPOS). The repository includes a plurality of directories such as DIR.X, DIR.Y, DIR.Z and can be itself the directory of files directly attached thereto. Each directory can be divided into a plurality of subdirectories such as SDIR.X or SDIR.Y and so on, and each folder such as DIR.Z or SDIR.X can be the directory of files directly attached thereto. The depth tree (the number of folder levels) depends upon the operating system of the source data processing unit in which are stored the files.

The principle of the method according to the invention is to build objects based upon a file transfer tool model shown in Fig. 2. Such a model enables to build a data encapsulation by

functions. For this, it is composed of two parts described as follows :

• **A header** : itself divided in five functions listed below :

- *Set directory name* : function which sets the directory name data
- *Get environment* : function which gives the first fourth body elements (directory name, installed directory, size and version)
- *Set environment* : function which sets the first fourth body elements (directory name, installed directory, size and version)
- *Create* : function which makes the data package and complete body element (installed directory, size and version)
- *Install data* : function which gives the action required on data package such as uncompress or copy data

• **A body** : itself divided in five items listed bellow :

- *a directory name* which is the root directory of the object component
- *an installed directory* which is the parent directory under where the object component will be installed
- *a size* which is the real data size
- *a version* which is the object versionning
- *a data package*

Each object built in the storage of the source data processing unit according to the above model represents each directory just after the root with all subdirectories and the corresponding files. Thus, the file system shown in Fig. 1 will be built into three object components (COMP) 10, 12, and 14 as represented in Fig. 3. Object component 10 includes all files of DIR.X, object component 12 includes all files of DIR.Y and object component 14 includes all files of DIR.Z. When the root REPOS includes itself files such as it is the case for the file system of Fig. 1, a particular object structure (STRUCT) 16 containing the root directory REPOS and

the associated files must be built always according to the file transfer tool model shown in Fig. 2. Differently from the other object components, it is just necessary to polymorphe the function "create" because only files must be taken into
5 account to build the data package.

While the invention is described by building an object component for each first level of directory only, it must be noted that the same type of object components could be also built for each other level of directory such as SDIR.X or
10 SDIR.Y.

The purpose of building the objects (COMP OR STRUCT) is to generate two files, a descriptor file and an archive file in the storage of the source data processing unit, which will be sent from the source data processing unit to the destination
15 data processing unit. For this generation, the functions in the header of the object are defined as follows :

• **OBJECT COMP**

• *Set directory name*

syntax : Obj::Set Directory Name = Value

20 Object parameter needed : no

Function : Set the data Directory Name to Value in the descriptor file of the object Obj

• *Get environment*

Syntax : parameterlist = Obj::Get environment

25 Object parameter needed : no

Function : Return from descriptor file of object Obj the Parameterlist, Directory name, Directory Install, Size and Version

• *Set environment*

30 Syntax : Obj::Set Environment = parameterlist

Object parameter needed : no

Function : Set the data parameter Directory name, Directory Install, Size and Version

to parameterlist in the descriptor file of the
Object Obj

- *Create*

Syntax : Obj::Create

5 Object parameter needed : Obj::Directory Name

Function :

1. Create the archive file from Obj::Directory Name
2. Evaluate the size of directories and files which are
inside the archive file and set object data parameter
Obj::size to this size
3. Set Obj::Directory Install to the parent directory of
Obj::Directory Name
4. Set Obj::Version = (for example current date)

- *Install data*

15 Syntax : Obj::Install Data

Object parameter needed : Directory name, Directory
install, Size and version

Function :

1. Go to the directory Obj::Directory Install
2. Unpackage the directories and files from the archive
file
3. Evaluate the size of directories and files which have
been unpacked from archive file and compare to
Obj::size

25 • **OBJECT STRUCT**

- *Set directory name*

syntax : Obj::Set Directory = Value

Object parameter needed : no

function : Set the data parameter Directory Name to Value
in the descriptor file of the object Obj

- *Get environment*

syntax : Obj::Get Environment

Object parameter needed : no

function : Return from descriptor file of object Obj the
parameter Directory name, Directory install,

Size and Version

• Set environment

syntax : Obj::Set environment = Parameterlist

Object parameter needed : no

5 function : Set the data parameter Directory name,
Directory install, Size and Version to Parameterlist in the descriptor file of the object
Obj

• Create

10 syntax : Obj::Create

Object parameter needed : Obj::Directory Name

function :

1. Create the archive file from Obj::Directory Name
take only the files
- 15 2. Evaluate the size of directories and files which are
inside the archive file and set object data
parameter Obj::size to this size
3. Set Obj::Directory install to Null
4. Set Obj::Version = (for example current date)

20 • Install data

syntax : Obj::Install Data

Object parameter needed : Directory name, Directory
install Size and Version

function :

- 25 1. Go to directory Obj::Directory install
2. Unpackage the directories and files from the archive
file
3. Evaluate the size of directories and files which
have been unpacked from the archive file and compare
30 to Obj::size

Referring to Fig. 4, the Steps achieved to generate the files
to be sent are the following. First of all, a variable X is
set to 0 (step 20). It is then determined whether the object
is STRUCT or not (step 22). As X=0, the object to be processed
35 is STRUCT. The following step consists in defining the

descriptor file of the object STRUCT in memory (Step 24). Then, the directory name is set to the value of the root name REPOS (step 26). The archive file is created and all the remaining parameters of the descriptor file are set (step 28).
5 Finally, variable X is set to 1 (step 30) before coming back to determining that the object to be processed is now COMP 1 since X=1 (step 22).

At list of all directories under the root directory REPOS is first created (step 32). A variable ITEM is set to the indexed
10 element of the list (step 34). The following step consists in defining the descriptor file of the object COMP in memory (step 36). Then, the directory name is set to the value of the item directory (step 38). The archive file associated to the object is then created and the remaining parameters of the
15 descriptor file are set (step 40).

After that, a test is made to check whether the item being processed is the last one of the list (step 42). If so, the process is ended (step 44). If it is not the case, X is set to X+1 (step 46) before returning the process to setting ITEM to
20 the indexed element of the list (step 34).

When the descriptor file and the archive file are received by the destination data processing unit, they are stored into the storage of the unit and the algorithm as illustrated in Fig. 5 is performed. First of all, a variable X is set to 0 (step
25 50). It is then determined whether the received object is of the type STRUCT or not (step 52). As X=0 at the beginning, the object to be processed is STRUCT. The following step consists in reading the descriptor file of the object (step 54) and then, defining the object STRUCT from the information
30 contained in the descriptor file stored in the storage of the destination processing unit (step 56). Then, the environment parameter is set with the value got when reading the received descriptor file (step 58), and the data contained in the

archive file are unarchived and installed into the storage (step 60). Finally, variable X is set to 1 (step 62) before the process comes back to determining the object to be processed in now COMP 1 since X=1 (step 52).

- 5 A list of all objects of the COMP type is first created (step 64). A variable ITEM is set to the indexed element of the list (step 66). The following step consists in reading the descriptor file of the object COMP (step 68) and then, defining the object in the storage of the destination data processing unit (step 70). Then, the environment parameter is set with the value got when reading the corresponding descriptor file (step 72), and the data contained in the archive file are unarchived and installed into the storage (step 74).
- 10
- 15 After that, a test is made to check whether the item being processed is the last one of the list (step 76). If so, the process is ended (step 78). If it is not the case, variable X is set to X+1 (step 80) before returning the process to setting ITEM to the indexed element X of the list.
- 20 The method described here above applies to all structures composed of folders and files such as the file systems for the e-business software distribution used for Windows platform code. Such a method enables to reduce the number of elements to be transmitted and therefore increases the knowledge of the application contents. It also reduces the verification process, improves the delivery reliability, and enables to update easily the structure already installed.
- 25

CLAIMS

1. Object-oriented method of transferring a file system including folders and data files from a source data storage controlled by a source data processing unit to a destination data storage controlled by a destination data processing unit over a transfer medium ; said method consisting in
- 5 - building in said source data storage at least a file object containing the data package to be transferred,
- 10 - generating a descriptor file including the parameters associated with said file object,
- generating an archive file including said data package, and,
- 15 - transmitting said descriptor file and said archive file from said source data processing unit to said destination data processing unit over said transfer medium.
2. Object-oriented method according to claim 1, wherein said file object is built by using a file transfer tool model including
- 20 - a header containing the following functions : set directory name, get environment, set environment, create and install data, and
- a body containing the following items : directory name directory install, size, version and data package.
- 25 3. Object-oriented method according to claim 1 or 2, wherein said file object is a component object (COMP) corresponding to the files which are associated with a directory.
- 30 4. Object-oriented method according to claim 1 or 2, wherein said file object is an object (STRUCT) corresponding to the files which are associated with the root (REPOS) as directory.

5. Object-oriented method according to claim 3 or 4, wherein the steps of generating said descriptor file and archive file consists in defining the descriptor file in said source data storage, setting the directory name in said descriptor file, creating said archive file from the data package and setting the remaining parameters (installed directory, size, version) in said descriptor file.

6. Object-oriented method for receiving in a destination storage controlled by a destination data processing unit a file system which is transferred from a source data storage controlled by a source data processing unit according to the object-oriented method defined by any one of claims 1 to 5, comprising the steps of :

- reading the received descriptor file
- defining a file object from the information contained in said descriptor file
- setting the environment parameter of said file object with the value got from said descriptor file , and
- unarchive all data contained in the received archive file and install these data in said destination data storage.

7. System comprising means adapted for carrying out the steps of the method according to any one of claim 1 to 5.

8. System comprising means adapted for carrying out the steps of the method according to claim 6.

OBJECT-ORIENTED METHOD OF TRANSFERRING A FILE SYSTEM

Abstract

Object-oriented method of transferring a file system including folders and data files from a source data storage controlled by
5 a source data processing unit to a destination data storage controlled by a destination data processing unit over a transfer medium. This method consists in building in the source data storage at least a file object containing the data package to be transferred, generating a descriptor file including the
10 parameters associated with the file object, generating an archive file including the data package, and transmitting the descriptor file and the archive file from the source data processing unit to the destination data processing unit over the transfer medium.

15 FIG. 3

This Page Blank (uspto)

FR 9 00 055
Isabelle Agulhon
1/4

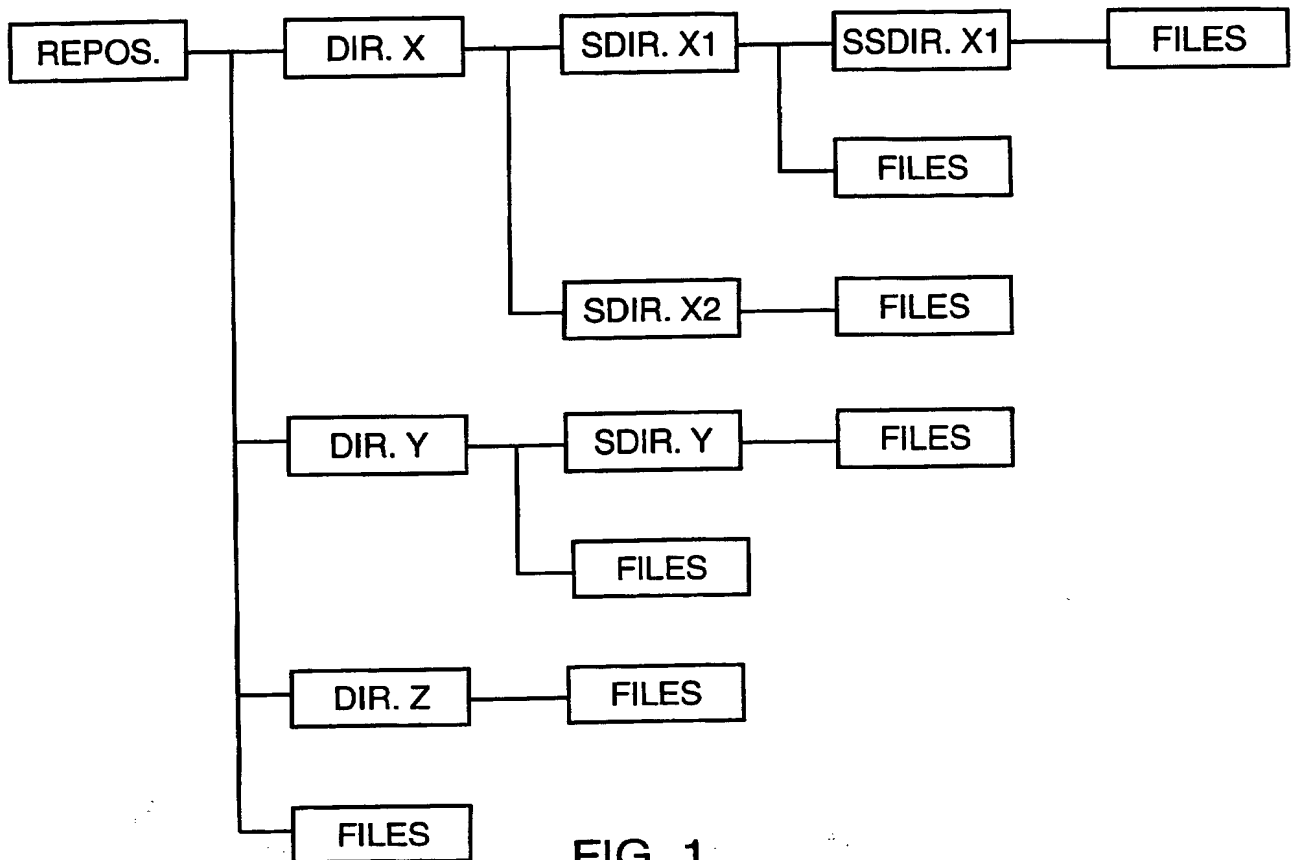


FIG. 1

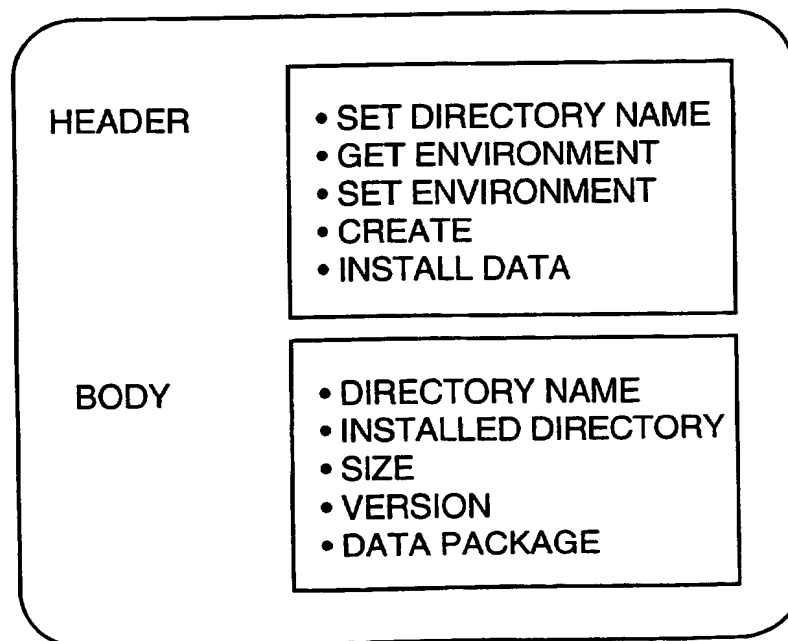


FIG. 2

FR 9 00 055
Isabelle Agulhon
2/4

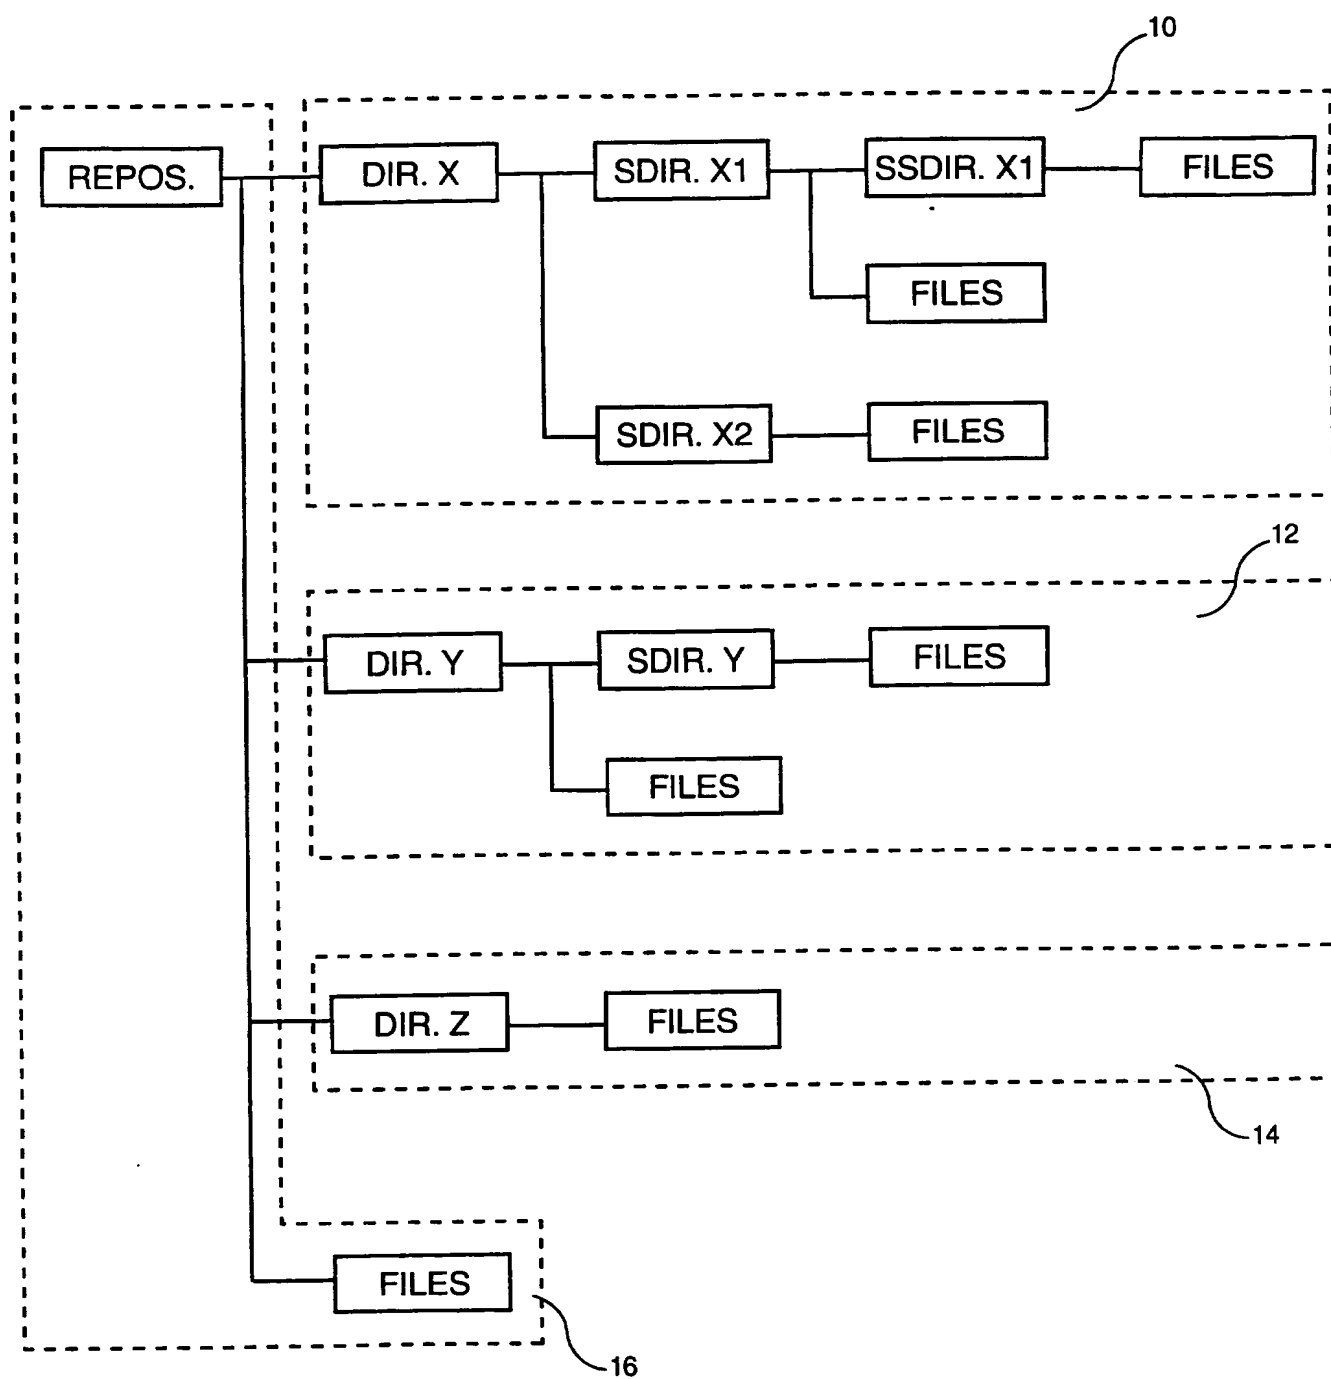


FIG. 3

FR 9 00 055
Isabelle Agulhon
3/4

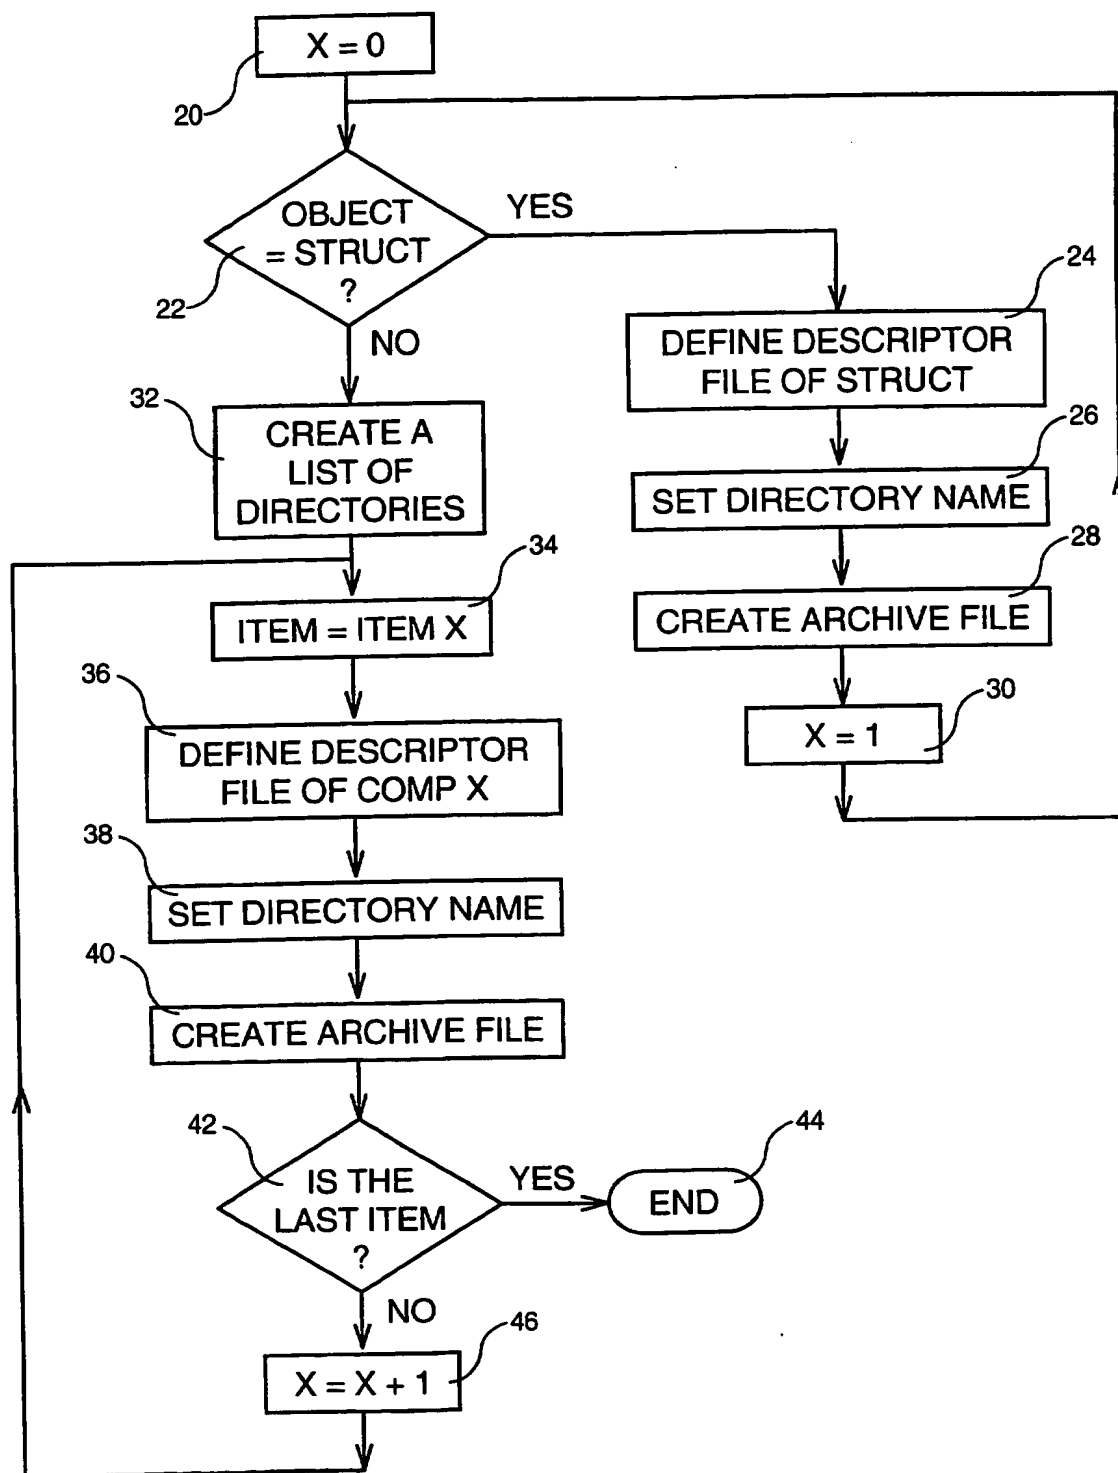


FIG. 4

FR 9 00 055
Isabelle Aguilhon
4/4

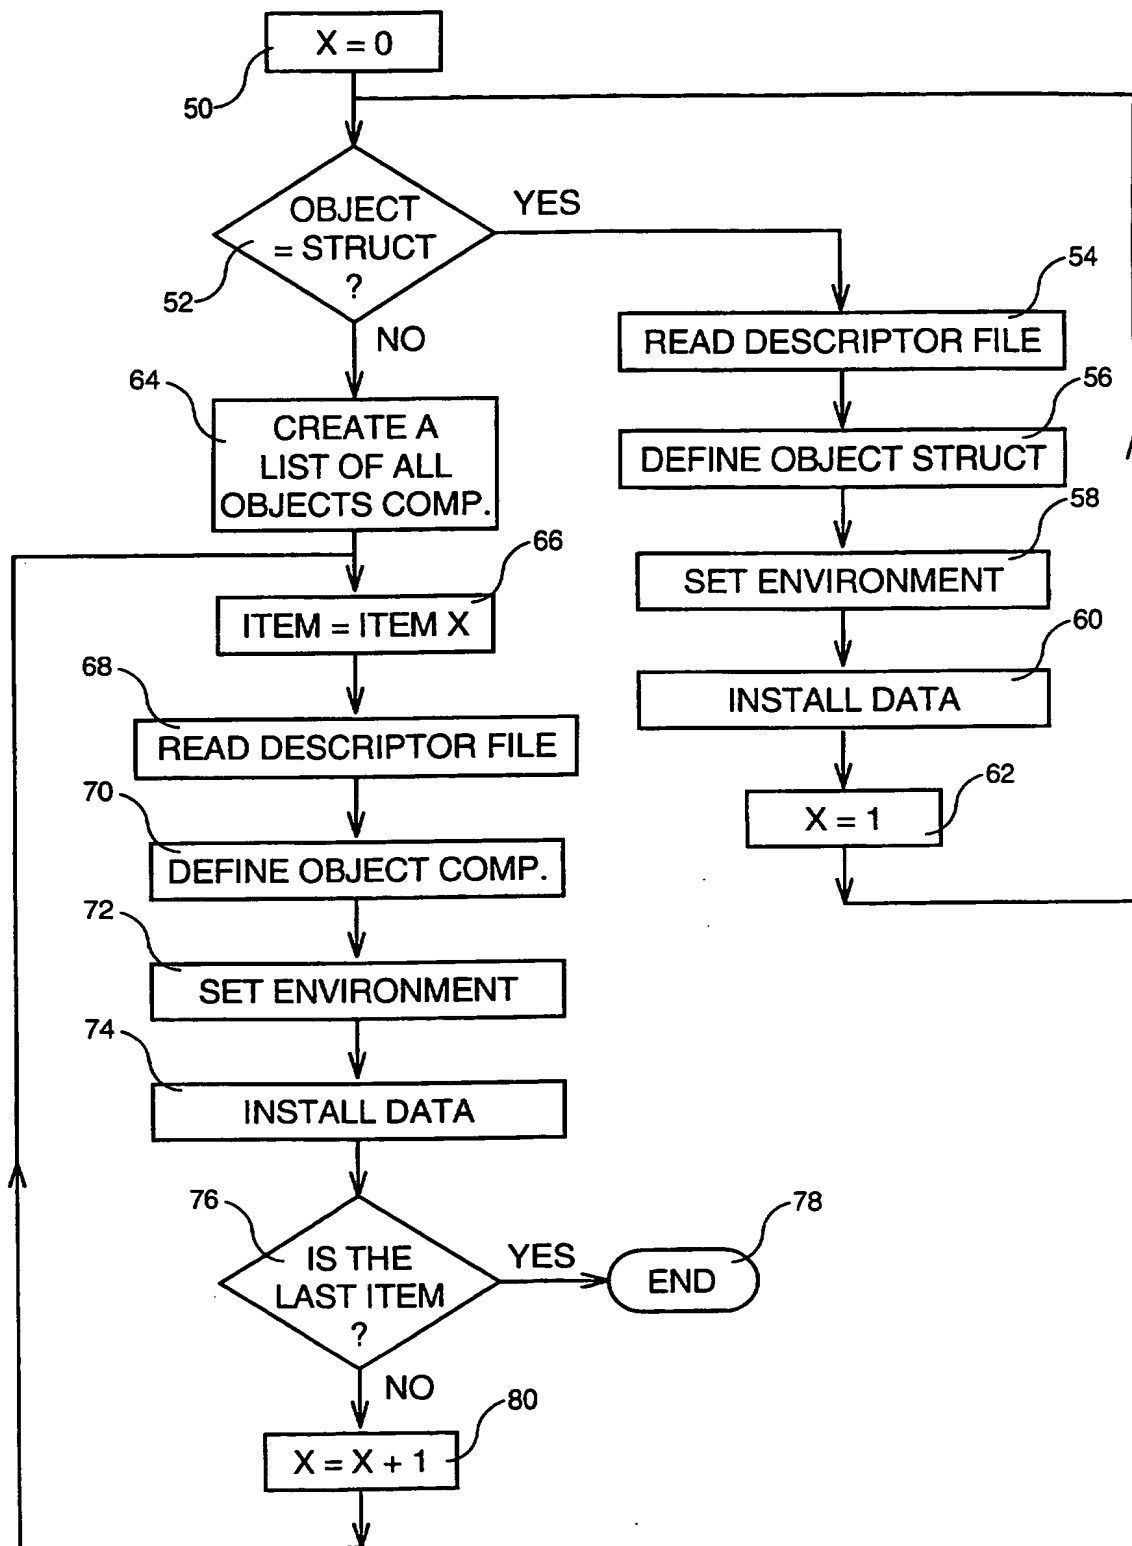


FIG. 5